




Multi-Domain Denoise

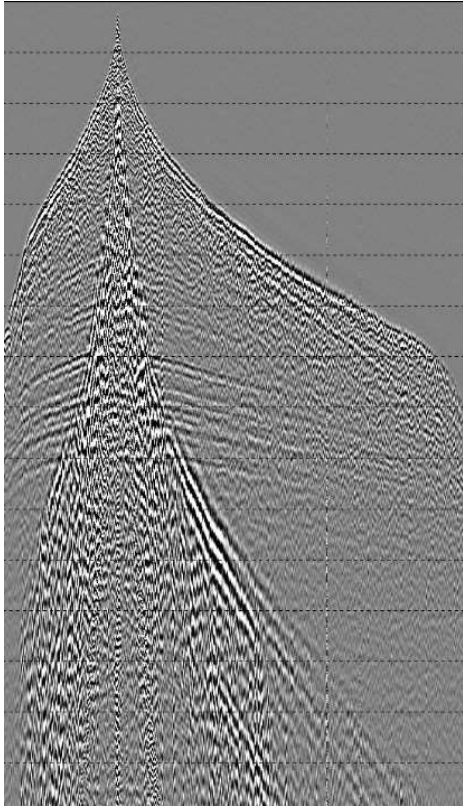

Input Shot

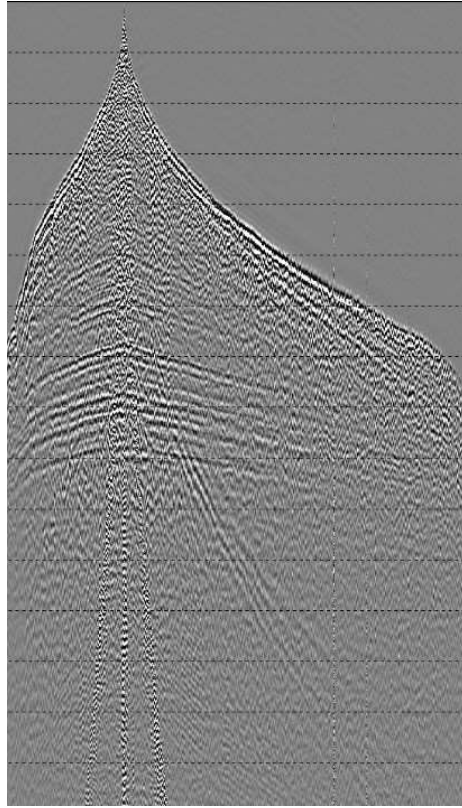

Denoise Shot

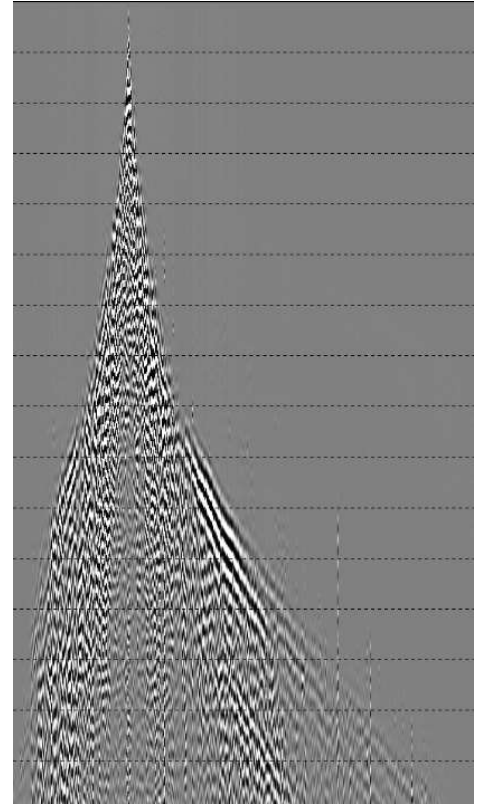

Difference

Pre-imaging denoise is achieved through analysis in multiple domains at various stages throughout the processing sequence.

By analyzing seismic attributes related to the near surface the noise can be identified and removed via various replacement schemes.

Allows confidence for subsequent inversion and AVO analysis.